


NEOS Protect Ltd. Secured by Design Approved Models.




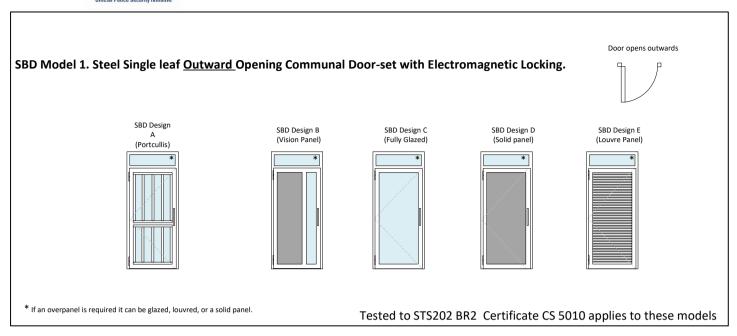


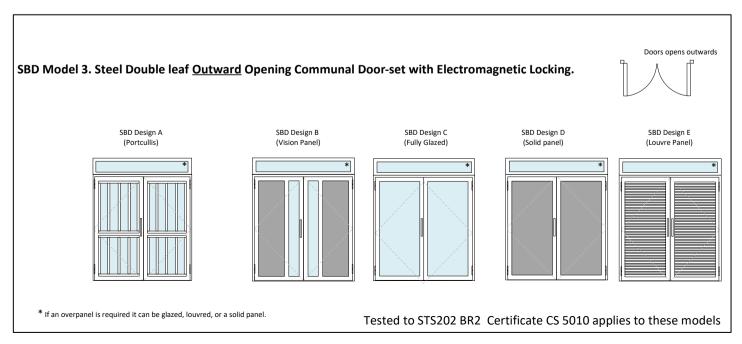



SBD Model 4. Steel Single leaf Outward or Inward Opening Communal Door-set with Side Screen Doors opens outwards Doors opens inwards & Electromagnetic Locking. SBD Design A SBD Design B SBD Design C SBD Design D SBD Design E (Portcullis) (Vision Panel) (Fully Glazed) (Solid panel) (Louvre Panel) $f{*}$ If an overpanel is required it can be glazed, louvred, or a solid panel. Tested to STS202 BR2 Certificate CS 5010 applies to these models

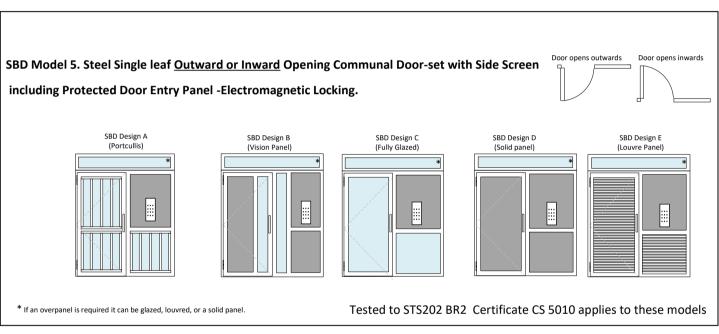

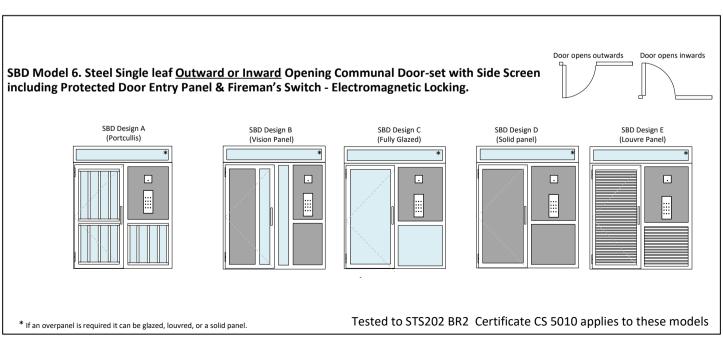

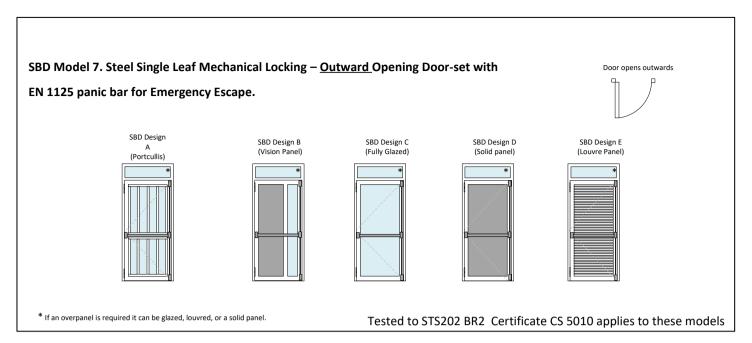

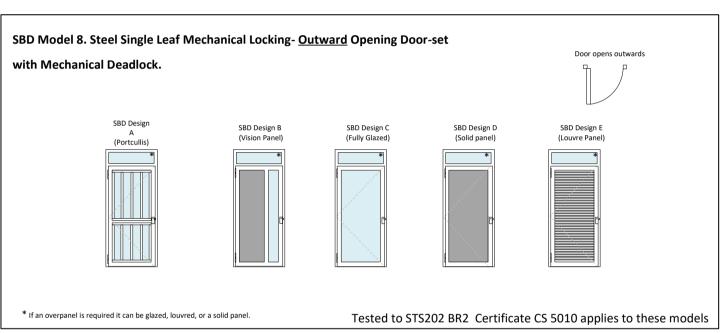

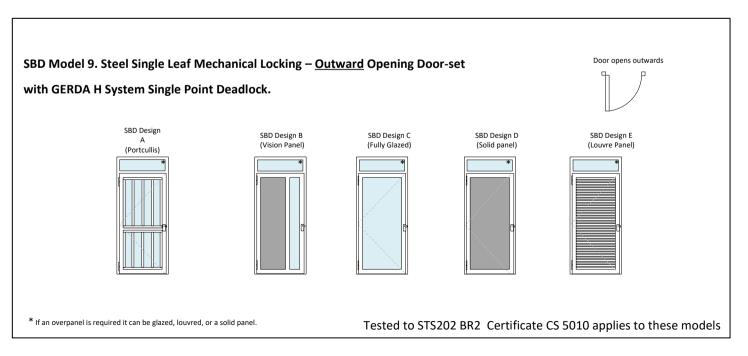


SBD Model 10. NEOS HI Thermally Insulated Steel Single Leaf Communal Door-set with Electromagnetic Locking. SBD Design B (Vision Panel) Fully Glazed SBD Design C (Fully Glazed) SBD Design E (Louvre Panel)

* If an overpanel is required it can be glazed, louvred, or a solid panel.


Tested to STS202 BR2 Certificate CS 5010 applies to these models



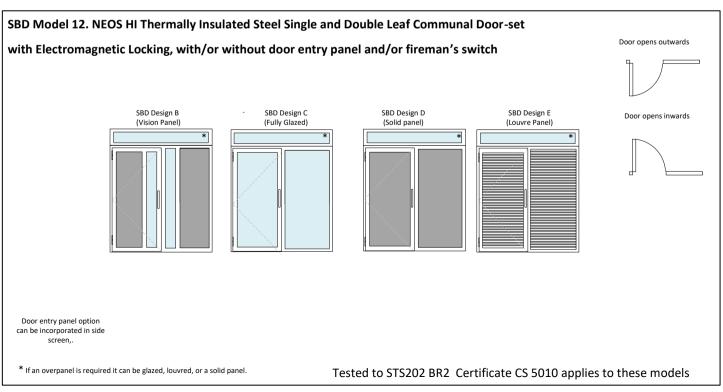


SBD Model 13. DUAL SCOPE Fire and Security Steel Single Leaf Outward Opening Communal Door-set with Electromagnetic Locking.















SBD Design B

(Vision Panel)


Tested to STS202 BR2 and up to 60 minutes Fire integrity and insulation Certificate CS 5119 applies to these models

SBD Model 14. DUAL SCOPE Fire and Security Steel Double Leaf Outward Opening Communal Door-set with Electromagnetic Locking.





Doors opens outwards






SBD Design C

(Fully Glazed)



Tested to STS202 BR2 and up to 60 minutes Fire integrity and insulation Certificate CS 5119 applies to these models

SBD Model 15. DUAL SCOPE Fire and Security Single or Double leaf Outward or Inward Opening Communal Door-set with side screen or side screens



SBD Design B

SBD Design C (Fully Glazed) with side screen or screens, glazed or solid.



SBD Design D (Solid panel)with side screen or screens, glazed or solid.



SBD Design F (Solid panel with fire grilles) With side screen or side screens.



Door opens outwards Door opens inwards

* If an overpanel is required it can be glazed or a solid panel.

Tested to STS202 BR2 and up to 60 minutes Fire integrity and insulation Certificate CS 5119 applies to these models

^{*} If an overpanel is required it can be glazed or a solid panel.

^{*} If an overpanel is required it can be glazed or a solid panel.